



REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	A1	CORRECT_LEAD_PITCH	01/13/10	

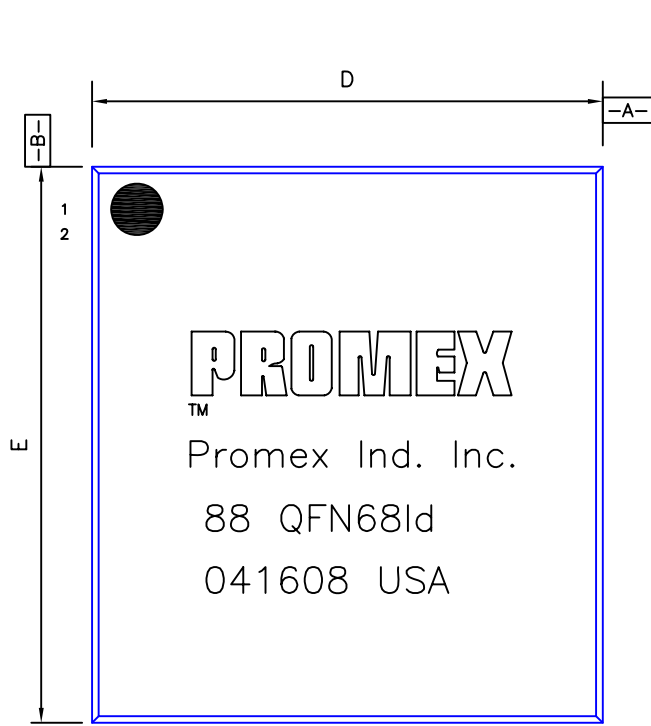

⌀ 0.20 C A B

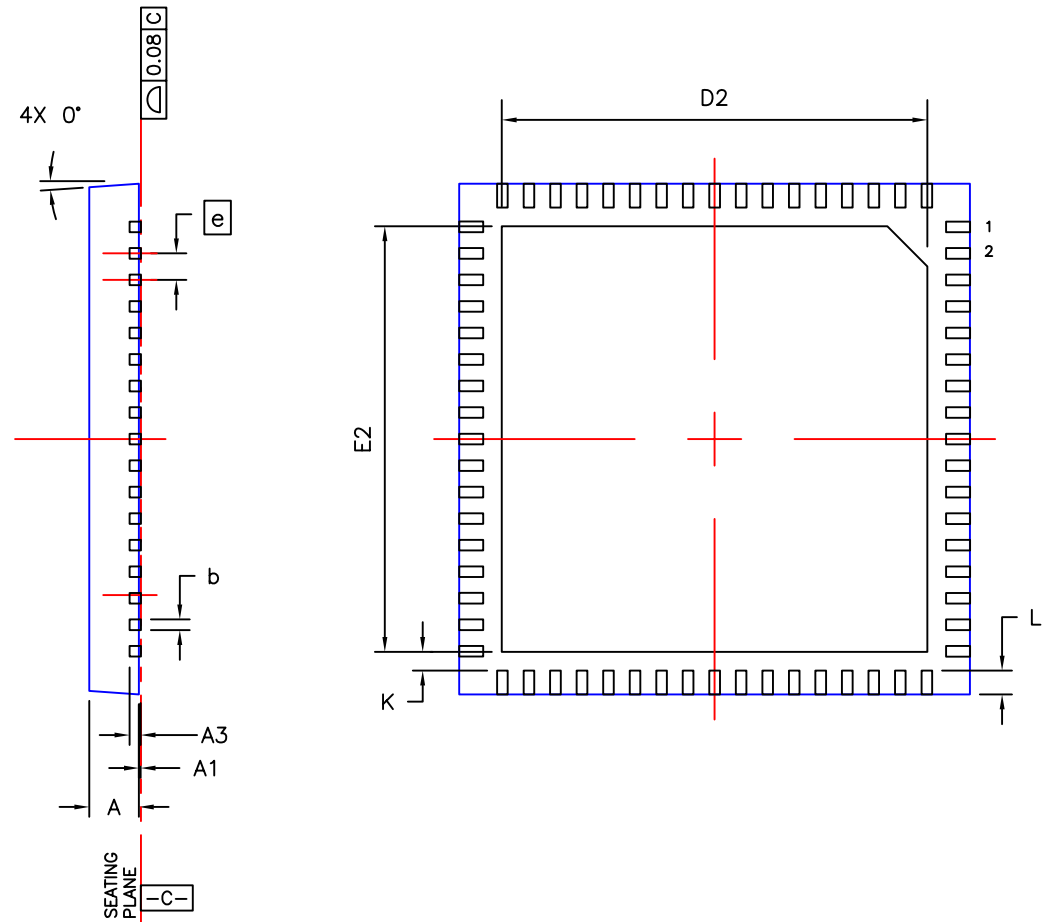

SYMBOL	MILLIMETERS		INCHS	
	MIN	MAX	MIN	MAX
A, V	0.80	1.00	0.032	0.040
A, W	0.70	0.80	0.027	0.032
A1	0.00	0.05	0.000	0.002
A3	0.20 REF		0.008 REF	
b	0.18	0.30	0.007	0.012
D	9.00 BSC		0.354 BSC	
D2	7.50	7.80	0.295	0.307
E	9.00 BSC		0.354 BSC	
E2	7.50	7.80	0.295	0.307
e	0.40 BSC		0.016 BSC	
K	0.20	-	0.008	-
L	0.35	0.45	0.014	0.018
L1	-	-	-	-
θ	0°	12°	0°	12°

NOTES:

- PACKAGE CONFORMS TO JEDEC MO-220, VMMD
- L/F MATERIAL : OLIN 194 HH or FH COPPER THICKNESS : 0.20±0.008
- PLATING : 1.27µm MIN. Ni, 0.25µm MIN. Pd, 0.076µm MIN. Au
- DIM AND TOL CONFORM TO ASME Y14.5M-1994
- ALL DIM ARE IN MM, 0 IS IN DEG
- DIM b APPLIES TO METALLIZED TERMINAL AND IS MEASURED BETWEEN 0.15mm AND 0.30mm FROM TIP.

ALL INFORMATION CONTAINED HEREON IS THE PROPERTY OF PROMEX, INC. AND IS CONSIDERED PROPRIETARY AND SUBJECT TO RETURN UPON DEMAND. ACCEPTANCE AND RETENTION HEREOF SIGNIFIES AGREEMENT BY THE RECIPIENT THAT THE INFORMATION WILL NOT BE DISCLOSED TO OTHERS NOR USED CONTRARY TO THE INTEREST OF PROMEX, INC. WITHOUT PRIOR WRITTEN PERMISSION.

MATERIAL: OLIN C194 Cu		CONTRACT NO.		3075 Oakmead Village Drive Santa Clara, CA 95051	
FINISH:		DRAWN	DATE	TITLE	
UNSPECIFIED TOLERANCE: DO NOT SCALE DRAWING DIMENSIONS APPLY AFTER PLATING		BOB CATTANED	07/08	QFN-8mm, 68LD PACKAGE OUTLINE	
DEC. ± 0.3 ± 0.08 ± 0.012 MM		CHECK	07/08	SIZE	DWG NO.
± 0.01 ± 0.003 ± 0.0005 INCH		BOB CATTANED	07/08	A	88QFN68SALES
ANGLES ± 5°		DESIGN		REV	A1
RADIUS = R0.05 MAX		BOB CATTANED			
USED ON	NEXT ASSEMBLY	DESIGN ACTIVITY		CAGE CODE:	FILE NAME
GENERAL USE				3FY32	88QFN68_PO.dwg
		CUSTOMER		SHEET	1 of 1